
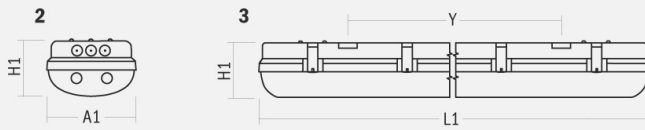



SupraDry XP IP67 - EXPLOSION PROOF



SERIES	OPTIC		WATTS	LAMP	PICTURE	DIMENSIONS			BRACKET SPACING
	DIF	REF				A1	L1	H1	Y
SDXP-2F32	•	•	2x32	T8	2;3	160	1270	101	918
SDXP-3F32	•	•	3x32	T8	2;3	160	1270	101	918
SDXP-2F54	•	•	2x54	T5	2;3	160	1270	101	918

ALL DIMENSIONS ARE IN MILLIMETRES

INSTALLATION

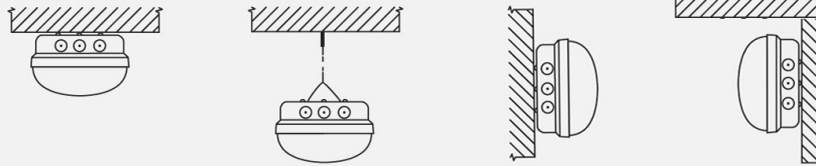

Suffixes:

- Power Supply Voltage:**
- 120
 - UNIV (120V - 277V 50/60 Hz)
 - 220
 - 240
 - 347

Approvals:

- SupraDry XP**
- CSA, UL, ETL or equivalent
 - UL 595,844,1570 or equivalent
 - Class I, Division 2, Groups A, B, C & D;