



TRIAD® B332I347RH

APPLICATION and PERFORMANCE SPECIFICATION

Description: High frequency electronic ballasts for (3 or 2) F32T8 lamps (and others as indicated below)
Also equivalent U-shaped lamps

• Line Voltage: 347vac, $\pm 10\%$, 60Hz

- Instant Start
- Parallel Lamp Operation

Lamps		Input Watts	Nominal Line Amps	Power Factor	Ballast Factor	Ballast Efficacy Factor	Harmonic Total	Crest
Type	#							Factor
F32T8	3	85	0.25	> .98	.88	1.04	< 20%	< 1.7
F32T8	2	65	0.19	> .95	.99	1.52	< 20%	< 1.7
F25T8	3	68	0.20	> .95	.90	1.32	< 20%	< 1.7
F17T8	3	47	0.14	> .95	.90	1.91	< 20%	< 1.7
F25T12	3	71	0.21	> .95	.79	1.11	< 20%	< 1.7

Application and Performance Specification Information Subject to Change without Notification.

Performance:

- Meets ANSI Standard C82.11-1993
- Meets ANSI Standard C62.41-1991
- Meets CSA Standard 108.6-M91(CISPR15) for EMI&RFI

Safety:

- No PCB's
- CSA Certified
- Class P, Type 1, Outdoor

Application:

- Minimum Starting Temperature: 0° F, -18° C
- Maximum Ambient Temperature: 105° F, 40° C
- Sound Rated: A
- Remote Mounting: 18 ft. max. lead length, 18 AWG


Physical Parameters:

Length:	9.50"
Width:	2.40"
Height:	1.55"
Weight:	2.30 lbs.
Lead Length:	White, Black 25" ($\pm 1"$)
	Red 48" ($\pm 1"$)
	Blue 31" ($\pm 1"$)

Warranty:

Universal Lighting Technologies warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 5 years from date of manufacture when properly installed and under normal conditions of use. Call **1-800-BALLASTx800** for technical assistance.

Manufactured in North America

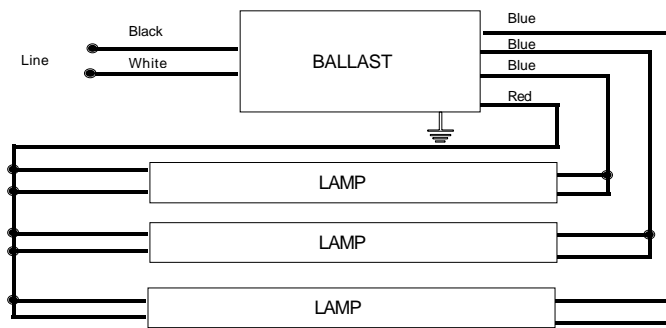

NOTE: For two lamp application, cap any blue lead, insulate to 600 Volts.

Ballast Must be Grounded