



SPECIFICATION SHEET : **WH7-120-L**

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.




REFER TO LAMP LIST

ELECTRICAL DATA

INPUT VOLT: 120V $\pm$ 10%, 50/60Hz

LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR
F96T12HO(110W)	1	115	1.04	1.12	0.97
F96T12HO(110W)	2	242	2.16	1.17	0.48
F96T12HO(95W)	1	96	0.87	1.11	1.16
F96T12HO(95W)	2	199	1.79	1.14	0.57
F96T12VHO	1	192	1.73	1.04	0.54
F36T12HO	2	99	0.89	0.86	0.88
POWER FACTOR	> 0.9				
THD	< 32 %				
EMI/RFI COMPLIANCE	FCC PART 18-A				
SOUND RATING	" A "				
BALLAST TYPE	INSTANT START				
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993				
INPUT/PROTECTION	FUSE				
OUTPUT/PROTECTION	-				
MIN. OPERATING TEMP	- 30 $^{\circ}$ C (- 20 $^{\circ}$ F)				
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)				
ENERGY STAR 4.0	-				
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR				

MECHANICAL DATA

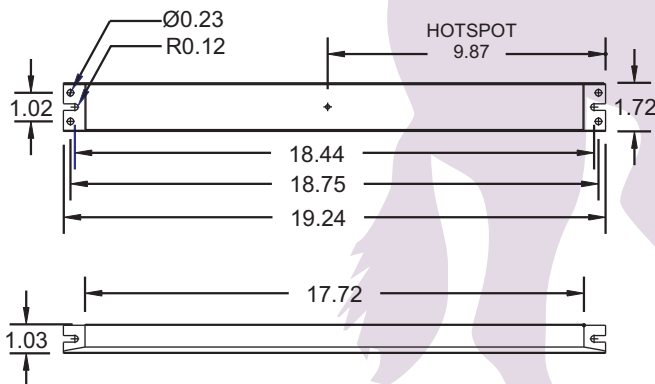

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 $\pm$ 1"	12 $\pm$ 1"	36 $\pm$ 1"	-	36 $\pm$ 1"	-

**WIRING DIAGRAMS DEPENDS
ON THE LAMP TYPE.
PLEASE REFER TO FULHAM'S CATALOG.**

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.



SPECIFICATION SHEET : **WH7-120-L**

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.




REFER TO LAMP LIST

ELECTRICAL DATA

INPUT VOLT: 120V $\pm$ 10%, 50/60Hz					
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR
F32T8	3	155	1.40	1.58	1.02
F54T5HO	4	202	1.80	0.80	0.39
CFT40W	4	203	1.82	1.19	0.59
F40T12	3	137	1.23	1.25	0.91
POWER FACTOR	> 0.9				
THD	< 32 %				
EMI/RFI COMPLIANCE	FCC PART 18-A				
SOUND RATING	" A "				
BALLAST TYPE	INSTANT START				
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993				
INPUT/PROTECTION	FUSE				
OUTPUT/PROTECTION	-				
MIN. OPERATING TEMP	- 30 $^{\circ}$ C (- 20 $^{\circ}$ F)				
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)				
ENERGY STAR 4.0	-				
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR				

MECHANICAL DATA

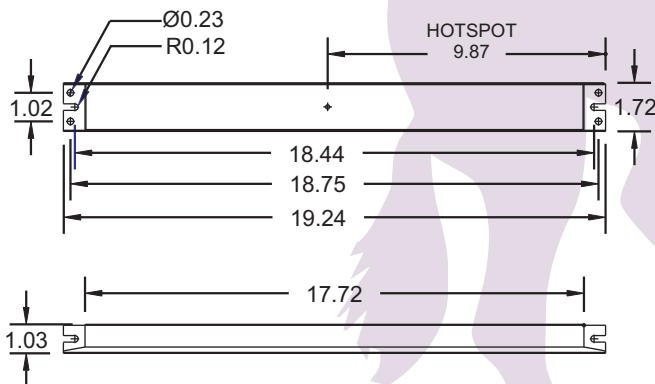

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 $\pm$ 1"	12 $\pm$ 1"	36 $\pm$ 1"	-	36 $\pm$ 1"	-

**WIRING DIAGRAMS DEPENDS
ON THE LAMP TYPE.
PLEASE REFER TO FULHAM'S CATALOG.**

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.