



MASTER CosmoWhite CPO-TW & CPO-TW Xtra

MASTER CosmoWhite CPO-TW Xtra 90W/728 PGZ12

New-generation ceramic metal halide lamps used in Outdoor offering efficient and pleasant white light

Product data

• General Characteristics

Cap-Base	PGZ12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 10% failures, base up	13000 hr
Life to 10% failures, horiz.	20000 hr
Life to 50% failures, base up	16000 hr
Life to 50% failures, horiz.	30000 hr
LSF EL 2kh Rated, 12h cyc. hor	99 %
LSF EL 4kh Rated, 12h cyc. hor	99 %
LSF EL 6kh Rated, 12h cyc. hor	99 %
LSF EL 8kh Rated, 12h cyc. hor	99 %
LSF EL 12kh Rated, 12h cyc. hor	98 %
LSF EL 16kh Rated, 12h cyc. hor	96 %
LSF EL 20kh Rated, 12h cyc. hor	90 %
LSF EL 24kh Rated, 12h cyc. hor	75 %
LSF EL 30kh Rated, 12h cyc. hor	50 %
LSF EL 2kh Rated, 12h cyc. bup	99 %
LSF EL 4kh Rated, 12h cyc. bup	99 %
LSF EL 6kh Rated, 12h cyc. bup	99 %

LSF EL 8kh Rated, 12h cyc. bup	99 %
LSF EL 12kh Rated, 12h cyc. bup	92 %
LSF EL 16kh Rated, 12h cyc. bup	50 %

• Light Technical Characteristics

Color Code	728 [CCT of 2800K]
Color Designation (text)	White
Lum. Flux EL25°C, Rat. base up	10000 Lm
Lum. Flux EL25°C, Rat. horiz.	10450 Lm
Luminous Flux @ ±60% power	4752 Lm
Lum Effic Rat EL 25°C base up	111 Lm/W
Lum Effic Rat EL 25°C horiz.	116 Lm/W
Luminous Efficacy @ ±60% power	88 Lm/W
Color Rendering Index, base up	49 (min), 58 (nom) Ra8
Color Rendering Index, horiz	57 (min), 66 (nom) Ra8
Color Temperature, base up	2800 K
Color Temperature, horizontal	2800 K
Color Temp. Technical, base up	2640 K
Color Temp. Technical, horiz.	2750 K



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

LLMF EL 2000h Rated, base up	94 %
LLMF EL 4000h Rated, base up	92 %
LLMF EL 6000h Rated, base up	92 %
LLMF EL 8000h Rated, base up	92 %
LLMF EL 16000h Rated, base up	88 %
LLMF EL 12000h Rated, base up	88 %
LLMF EL 2000h Rated, horiz.	94 %
LLMF EL 4000h Rated, horiz.	91 %
LLMF EL 6000h Rated, horiz.	88 %
LLMF EL 8000h Rated, horiz.	87 %
LLMF EL 12000h Rated, horiz.	84 %
LLMF EL 16000h Rated, horiz.	84 %
LLMF EL 20000h Rated, horiz.	82 %
LLMF EL 24000h Rated, horiz.	80 %
LLMF EL 30000h Rated, horiz.	78 %
Chromaticity Coordinate X	454 -
Chromaticity Coordinate Y	406 -
Chrom. Coord. X @ ±60% power	463 -
Chrom. Coord. Y @ ±60% power	414 -
Colour Temp. @ ±60% power	2675 K
CRI @ ±60% power	55 -

• Electrical Characteristics

Lamp Wattage	90 W
Lamp Voltage	92 V
Lamp Current EL	0.97 A
Ignition Time	30 (max) s
Run-up time 90%	4 (max) min
Dimmable	Yes
Re-ignition Time [sec]	900 (max) s
Lamp Wattage EL 25°C, Rated	90 W

Lamp Wattage EL 25°C, Nominal	90 W
Ratio scotopic/photopic lumens	1.15 -
Lamp Current EL at ±60% power	0.577 mA
Lamp Wattage EL at ±60% power	54 W

• Environmental Characteristics

Mercury (Hg) Content	1.6 mg
----------------------	--------

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.18 - 8 (min) h500lx
--------------------------------	--------------------------

• Luminaire Design Requirements

Cap-Base Temperature	300 (max) C
Bulb Temperature	470 (max) C

• Product Dimensions

Overall Length C	143 (max) mm
Diameter D	19 (nom), 20 (max) mm
Light Center Length L	66 mm
Arc Length O	18 mm

• Product Data

Order code	928093505127
Full product code	928093505127
Full product name	MASTER CosmoWhite CPO-TW Xtra 90W/728 PGZ12
Order product name	MST CosmoWh CPO-TW Xtra 90W/728 PGZ12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500211217
Bar code on outerbox - EAN3	8711500211224
Logistic code(s) - 12NC	928093505127
ILCOS code	MT-90/28/2B-H-PGZ12
Net weight per piece	0.037 kg

Warnings and Safety



- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

Dimensional drawing

- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Dimensional drawing

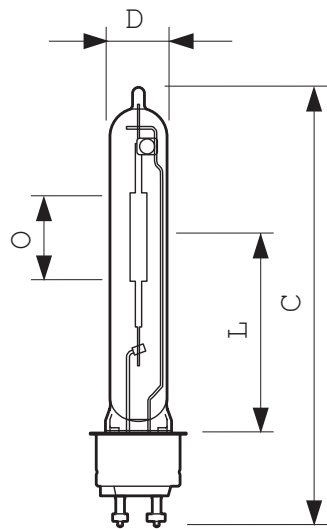


PGZ12

CPO-TW 90W, 140W PGZ12

Product	C (Max)	D (Norm)	D (Max)	L (Norm)	O (Norm)
CPO-TW Xtra 90W/728 PGZ12	143	19	20	66	18

Photometric data

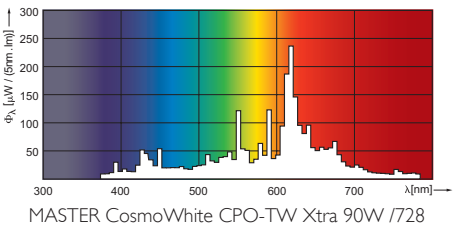



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, November 2
data subject to change