


Compact Fluorescent light

- 
- 62 PL-S Short Lamps
 - 62 PL-C Cluster 2-Pin Lamps
 - 63 PL-C Cluster 4-Pin Lamps
 - 64 PL-T Triple 4-Pin Lamps
 - 65 PL-L Long Lamps
 - 66 PL-H High Lamps
 - 66 PL-Q Square Shape Lamps
 - 67 PL Consumer Lamps
 - 68 PL Base Types and Bulb Shapes
 - 69 Footnotes

ing (ni)

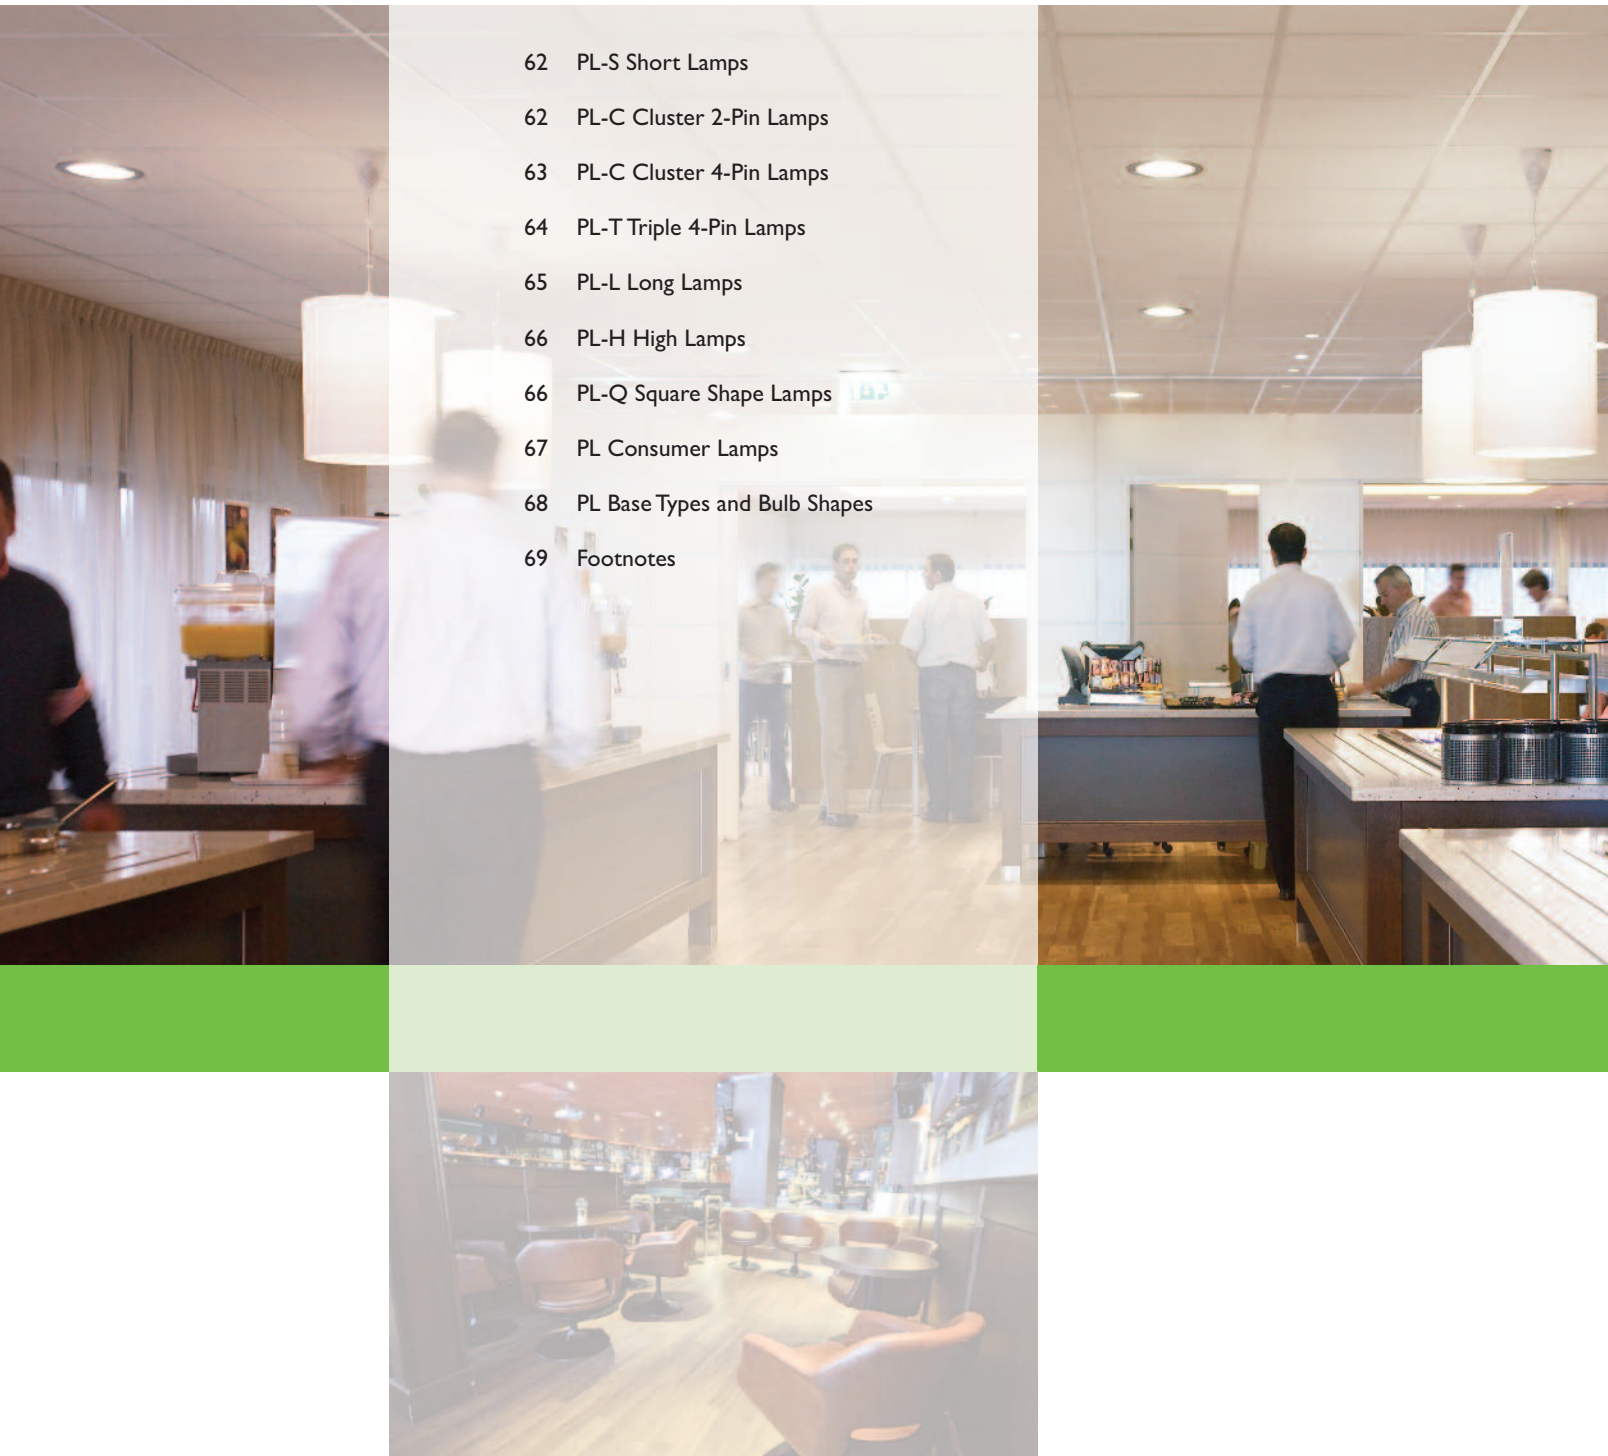

Energy savings made simple

Philips CFLni lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. Philips Energy Advantage lamps are fast becoming the preferred choice for maximum energy efficiency, high light output and sleek design solutions.

Philips Compact Fluorescent Non-Integrated lamps offer significant energy savings, high light output and a broad portfolio of design solutions for your everyday needs.

Philips Energy Advantage PL-L 25W offers significant savings in a small profile. The PL-L is available in a broad range of color temperatures and the light output is comparable to a 25W 4 foot linear fluorescent.

Philips Energy Advantage PL-T Lamps are a simple way to save energy without changing a ballast or sacrificing light output. The new bridged design also allows for better efficiency and an even more compact size.

Philips Energy Advantage PL-C Lamps offer significant energy savings in a compact size, perfect for downlights and recessed cans.

UPGRADE TO ENERGY EFFICIENT LAMPS

CURRENT PRODUCT	PHILIPS UPGRADE PRODUCT	BENEFIT	PAGE
 40W PL-L	 Energy Advantage PL-L 25W	> 95% lumen maintenance > 20% energy savings (when compared to a PL-L 40W)* > Only 1.4mg of mercury	65
 32W PL-T	 Energy Advantage PL-T 27W	> 88% lumen maintenance > 15% energy savings when replacing a 32W lamp† > Only 1.4 mg of mercury per lamp	64
 26W PL-C	 Energy Advantage PL-C 21W	> 88% lumen maintenance > 19% energy savings when replacing a 26W lamp‡ > Save energy without changing a ballast	63

* On Instant Start Ballast, a standard PL-L 40W only draws 32 Watts, so the actual savings is 7 Watts (32W - 25W = 7W), 40W - 32W = 8W / 40 = 20%

† 32W - 27W = 5W / 32W = 15%

‡ 26W - 21W = 5W / 26W = 19%

COMPACT FLUORESCENT LAMPS

PL-S and PL-C Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Generic Designation	Pkg. Qty.	Desc.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Approx. Initial Lumens (231)	Design Lumens (208)	CRI
PL-S (SHORT) FLUORESCENT LAMPS													
5	PL-S	G23	I4671-2	\$ ●	PL-S 5W/827/2P/ALTO	CFT5W/G23/827	10	2700K	4½	10,000	250	210	82
			I4868-4	\$ ●	PL-S 5W/841/2P/ALTO	CFT5W/G23/841	10	4100K	4½	10,000	250	210	82
7	PL-S	G23	I4871-8	\$ ●	PL-S 7W/827/2P/ALTO	CFT7W/G23/827	10	2700K	5½	10,000	400	360	82
			I4872-6	\$ ●	PL-S 7W/835/2P/ALTO	CFT7W/G23/835	10	3500K	5½	10,000	400	360	82
			I4873-4	\$ ●	PL-S 7W/841/2P/ALTO	CFT7W/G23/841	10	4100K	5½	10,000	400	360	82
9	PL-S	G23	I4867-6	\$ ●	PL-S 9W/827/2P/ALTO	CFT9W/G23/827	10	2700K	6½	10,000	600	540	82
			I4869-2	\$ ●	PL-S 9W/835/2P/ALTO	CFT9W/G23/835	10	3500K	6½	10,000	600	540	82
			I4870-0	\$ ●	PL-S 9W/841/2P/ALTO	CFT9W/G23/841	10	4100K	6½	10,000	600	540	82
13	PL-S	GX23	I4681-1	\$ ●	PL-S 13W/827/2P/ALTO	CFT13W/GX23/827	10	2700K	7¼	10,000	825	740	82
			I4683-7	\$ ●	PL-S 13W/830/2P/ALTO	CFT13W/GX23/830	10	3000K	7¼	10,000	825	740	82
			I4684-5	\$ ●	PL-S 13W/835/2P/ALTO	CFT13W/GX23/835	10	3500K	7¼	10,000	825	740	82
			I4685-2	\$ ●	PL-S 13W/841/2P/ALTO	CFT13W/GX23/841	10	4100K	7¼	10,000	825	740	82
			I4686-0	\$ ●	PL-S 13W/841/2P/ALTO/BULK	CFT13W/GX23/841	50	4100K	7¼	10,000	825	740	82
			I4687-8	\$ ●	PL-S 13W/850/2P/ALTO	CFT13W/GX23/850	10	5000K	7¼	10,000	800	720	82
			I4688-6	\$ ●	PL-S 13W/850/2P/ALTO/BULK	CFT13W/GX23/850	50	5000K	7¼	10,000	800	720	82

PL-C (CLUSTER) 2-PIN FLUORESCENT LAMPS—ENERGY ADVANTAGE

21	PL-C	G24d-3	24168-7	\$	PL-C 26W/830/XEW/ALTO 21W	CFQ26W/G24d/830	10	3000K	6⅓	10,000	1600	1375	82
			24169-5	\$	PL-C 26W/835/XEW/ALTO 21W	CFQ26W/G24d/835	10	3500K	6⅓	10,000	1600	1375	82

PL-C (CLUSTER) 2-PIN FLUORESCENT LAMPS

13	PL-C	GX23-2	38310-9	\$ ●	PL-C 13W/827/USA/ALTO	CFQ13W/GX23/827	10	2700K	4%	10,000	860	735	82
			38311-7	\$ ●	PL-C 13W/830/USA/ALTO	CFQ13W/GX23/830	10	3000K	4%	10,000	860	735	82
			38312-5	\$ ●	PL-C 13W/835/USA/ALTO	CFQ13W/GX23/835	10	3500K	4%	10,000	860	735	82
			38313-3	\$ ●	PL-C 13W/841/USA/ALTO	CFQ13W/GX23/841	10	4100K	4%	10,000	860	735	82
	PL-C	G24d-1	38314-1	\$ ●	PL-C 13W/827/ALTO	CFQ13W/G24d/827	10	2700K	5½	10,000	900	770	82
18	PL-C	G24d-2	38316-6	\$ ●	PL-C 18W/827/ALTO	CFQ18W/G24d/827	10	2700K	6	10,000	1250	1070	82
			38317-4	\$ ●	PL-C 18W/830/ALTO	CFQ18W/G24d/830	10	3000K	6	10,000	1250	1070	82
			38318-2	\$ ●	PL-C 18W/835/ALTO	CFQ18W/G24d/835	10	3500K	6	10,000	1250	1070	82
			38319-0	\$ ●	PL-C 18W/841/ALTO	CFQ18W/G24d/841	10	4100K	6	10,000	1250	1070	82
26	PL-C	G24d-3	38321-6	\$ ●	PL-C 26W/827/ALTO	CFQ26W/G24d/827	10	2700K	6⅓	10,000	1800	1545	82
			38322-4	\$ ●	PL-C 26W/830/ALTO	CFQ26W/G24d/830	10	3000K	6⅓	10,000	1800	1545	82
			38323-2	\$ ●	PL-C 26W/835/ALTO	CFQ26W/G24d/835	10	3500K	6⅓	10,000	1800	1545	82
			38324-0	\$ ●	PL-C 26W/841/ALTO	CFQ26W/G24d/841	10	4100K	6⅓	10,000	1800	1545	82

PL-C (CLUSTER) 2-PIN FLUORESCENT LAMPS, 15MM TUBE DIAMETER (222)


20	PL-C	GX32d-2	24168-7	\$	PL-C 15mm/22W/827	CFQ20W/GX32d/827	40	2700K	6	10,000	1200	995	82
27	PL-C	GX32d-3	24169-5	\$	PL-C 15mm/28W/827	CFQ27W/GX32d/827	40	2700K	6⅓	10,000	1600	1325	82

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 69

PHILIPS PL-S

Warranty Period: 12 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.

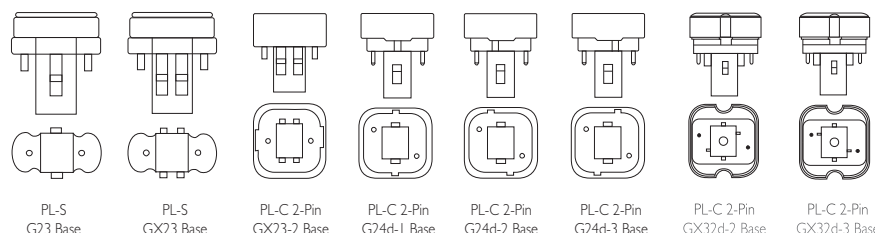

COMPACT FLUORESCENT LAMPS

PL-C Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Generic Designation	Pkg. Qty.	Desc.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Approx. Initial Lumens (231)	Design Lumens (208)	CRI
-------	------	------	----------------	--------------------	---------------	---------------------	-----------	-------	-----------	------------------------------	------------------------------	---------------------	-----

PL-C (CLUSTER) 4-PIN FLUORESCENT LAMPS, ELECTRONIC OPERATION—ENERGY ADVANTAGE

14	PL-C	G24q-2	22034-3	\$ ●	PL-C 18W/827/XEW/4P/ALTO 14W	CFQ18W/G24q/827	10	2700K	5 $\frac{1}{16}$	12,000	1100	1010	82
			22040-0	\$ ●	PL-C 18W/835/XEW/4P/ALTO 14W	CFQ18W/G24q/835	10	3500K	5 $\frac{1}{16}$	12,000	1100	1010	82
			22041-8	\$ ●	PL-C 18W/841/XEW/4P/ALTO 14W	CFQ18W/G24q/841	10	4100K	5 $\frac{1}{16}$	12,000	1100	1010	82
21	PL-C	G24q-3	22042-6	\$ ●	PL-C 26W/827/XEW/4P/ALTO 21W	CFQ26W/G24q/827	10	2700K	6 $\frac{1}{8}$	12,000	1525	1400	82
			22047-5	\$ ●	PL-C 26W/835/XEW/4P/ALTO 21W	CFQ26W/G24q/835	10	3500K	6 $\frac{1}{8}$	12,000	1525	1400	82
			22048-3	\$ ●	PL-C 26W/841/XEW/4P/ALTO 21W	CFQ26W/G24q/841	10	4100K	6 $\frac{1}{8}$	12,000	1525	1400	82

PL-C (CLUSTER) 4-PIN FLUORESCENT LAMPS, ELECTRONIC OPERATION

13	PL-C	G24q-1	38325-7	\$ ●	PL-C 13W/827/4P/ALTO	CFQ13W/G24q/827	10	2700K	5 $\frac{3}{16}$	12,000	900	775	82
			38326-5	\$ ●	PL-C 13W/830/4P/ALTO	CFQ13W/G24q/830	10	3000K	5 $\frac{3}{16}$	12,000	900	775	82
			38327-3	\$ ●	PL-C 13W/835/4P/ALTO	CFQ13W/G24q/835	10	3500K	5 $\frac{3}{16}$	12,000	900	775	82
			38328-1	\$ ●	PL-C 13W/841/4P/ALTO	CFQ13W/G24q/841	10	4100K	5 $\frac{3}{16}$	12,000	900	775	82
18	PL-C	G24q-2	38329-9	\$ ●	PL-C 18W/827/4P/ALTO	CFQ18W/G24q/827	10	2700K	5 $\frac{1}{16}$	12,000	1250	1075	82
			38330-7	\$ ●	PL-C 18W/830/4P/ALTO	CFQ18W/G24q/830	10	3000K	5 $\frac{1}{16}$	12,000	1250	1075	82
			38332-3	\$ ●	PL-C 18W/835/4P/ALTO	CFQ18W/G24q/835	10	3500K	5 $\frac{1}{16}$	12,000	1250	1075	82
			38333-1	\$ ●	PL-C 18W/841/4P/ALTO	CFQ18W/G24q/841	10	4100K	5 $\frac{1}{16}$	12,000	1250	1075	82
26	PL-C	G24q-3	38334-9	\$ ●	PL-C 26W/827/4P/ALTO	CFQ26W/G24q/827	10	2700K	6 $\frac{1}{8}$	12,000	1800	1550	82
			38335-6	\$ ●	PL-C 26W/830/4P/ALTO	CFQ26W/G24q/830	10	3000K	6 $\frac{1}{8}$	12,000	1800	1550	82
			38336-4	\$ ●	PL-C 26W/835/4P/ALTO	CFQ26W/G24q/835	10	3500K	6 $\frac{1}{8}$	12,000	1800	1550	82
			38337-2	\$ ●	PL-C 26W/841/4P/ALTO	CFQ26W/G24q/841	10	4100K	6 $\frac{1}{8}$	12,000	1800	1550	82

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 69

PHILIPS PL-C

Warranty Period: 18 months*

PHILIPS PL-C




ENERGY ADVANTAGE

Warranty Period: 24 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.



PL-C 4-Pin

PL-C 4-Pin
G24q-1 BasePL-C 4-Pin
G24q-2 BasePL-C 4-Pin
G24q-3 Base

COMPACT FLUORESCENT LAMPS

PL-T Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Generic Designation	Pkg. Qty.	Desc.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Approx. Initial Lumens (231)	Design Lumens (208)	CRI
PL-T (TRIPLE) 4-PIN FLUORESCENT ENERGY ADVANTAGE LAMPS													
21	PL-T	GX24q-3	40779-1	\$ ● †	PL-T 26W/830/XEW/4P/ALTO 21W	CFTR26W/GX24q/830	10	3000K	5	16,000	1400	1235	82
			40780-9	\$ ● †	PL-T 26W/835/XEW/4P/ALTO 21W	CFTR26W/GX24q/835	10	3500K	5	16,000	1400	1235	82
27	PL-T	GX24q-3	22021-0	\$ ●	PL-T 32W/830/XEW/4P/ALTO 27W	CFTR32W/GX24q/830	10	3000K	5½	16,000	1875	1725	82
			22022-8	\$ ●	PL-T 32W/835/XEW/4P/ALTO 27W	CFTR32W/GX24q/835	10	3500K	5½	16,000	1875	1725	82
			22024-4	\$ ●	PL-T 32W/841/XEW/4P/ALTO 27W	CFTR32W/GX24q/841	10	4100K	5½	16,000	1875	1725	82
33	PL-T	GX24q-4	22026-9	\$ ●	PL-T 42W/830/XEW/4P/ALTO 33W	CFTR42W/GX24q/830	10	3000K	6½	16,000	2615	2400	82
			22028-5	\$ ●	PL-T 42W/835/XEW/4P/ALTO 33W	CFTR42W/GX24q/835	10	3500K	6½	16,000	2615	2400	82
			22029-3	\$ ●	PL-T 42W/841/XEW/4P/ALTO 33W	CFTR42W/GX24q/841	10	4100K	6½	16,000	2615	2400	82

PL-T (TRIPLE) 4-PIN FLUORESCENT LAMPS—INSTANT ON TECHNOLOGY

13	PL-T	GX24q-1	14992-2	\$ ● ◇	PL-T 13W/827/X/4P/ALTO	CFTR13W/GX240/827	10	2700K	4¾	16,000	900	825	82
			14995-4	\$ ● ◇	PL-T 13W/841/X/4P/ALTO	CFTR13W/GX240/841	10	4100K	4¾	16,000	900	825	82
18	PL-T	GX24q-2	14923-7	\$ ● ◇	PL-T 18W/827/X/4P/ALTO	CFTR18W/GX240/827	10	2700K	4¾	16,000	1200	1020	82
			14926-0	\$ ● ◇	PL-T 18W/841/X/4P/ALTO	CFTR18W/GX240/841	10	4100K	4¾	16,000	1200	1020	82
26	PL-T	GX24q-3	14928-6	\$ ● ◇	PL-T 26W/827/X/4P/ALTO	CFTR26W/GX240/827	10	2700K	5	16,000	1800	1530	82
			14931-0	\$ ● ◇	PL-T 26W/841/X/4P/ALTO	CFTR26W/GX240/841	10	4100K	5	16,000	1800	1530	82

PL-T (TRIPLE) 4-PIN FLUORESCENT LAMPS

18	PL-T	GX24q-2	38437-0	\$ ●	PL-T 18W/827/4P/ALTO	CFTR18W/GX24q/827	12	2700K	4¾	16,000	1200	1020	82
			26802-9	\$ ●	PL-T 18W/830/4P/ALTO	CFTR18W/GX24q/830	12	3000K	4¾	16,000	1200	1020	82
			26820-1	\$ ●	PL-T 18W/835/4P/ALTO	CFTR18W/GX24q/835	12	3500K	4¾	16,000	1200	1020	82
			26822-7	\$ ●	PL-T 18W/841/4P/ALTO	CFTR18W/GX24q/841	12	4100K	4¾	16,000	1200	1020	82
26	PL-T	GX24q-3	38440-4	\$ ●	PL-T 26W/827/4P/ALTO	CFTR26W/GX24q/827	12	2700K	5	16,000	1800	1530	82
			26823-5	\$ ●	PL-T 26W/830/4P/ALTO	CFTR26W/GX24q/830	12	3000K	5	16,000	1800	1530	82
			26824-3	\$ ●	PL-T 26W/835/4P/ALTO	CFTR26W/GX24q/835	12	3500K	5	16,000	1800	1530	82
			26825-0	\$ ●	PL-T 26W/841/4P/ALTO	CFTR26W/GX24q/841	12	4100K	5	16,000	1800	1530	82
32	PL-T	GX24q-3	38443-8	\$ ●	PL-T 32W/827/4P/ALTO	CFTR32W/GX24q/827	12	2700K	5¾	16,000	2400	2040	82
			26832-6	\$ ●	PL-T 32W/830/4P/ALTO	CFTR32W/GX24q/830	12	3000K	5¾	16,000	2400	2040	82
			26833-4	\$ ●	PL-T 32W/835/4P/ALTO	CFTR32W/GX24q/835	12	3500K	5¾	16,000	2400	2040	82
			26872-2	\$ ●	PL-T 32W/841/4P/ALTO	CFTR32W/GX24q/841	12	4100K	5¾	16,000	2400	2040	82
42	PL-T	GX24q-4	38450-3	\$ ●	PL-T 42W/827/4P/ALTO	CFTR42W/GX24q/827	12	2700K	6¾	16,000	3200	2720	82
			26873-0	\$ ●	PL-T 42W/830/4P/ALTO	CFTR42W/GX24q/830	12	3000K	6¾	16,000	3200	2720	82
			26875-5	\$ ●	PL-T 42W/835/4P/ALTO	CFTR42W/GX24q/835	12	3500K	6¾	16,000	3200	2720	82
			26876-3	\$ ●	PL-T 42W/841/4P/ALTO	CFTR42W/GX24q/841	12	4100K	6¾	16,000	3200	2720	82
			13488-2	\$ ● (242)	PL-T 42W/835/4P/HTA ALTO	CFTR42W/GX24q/835	12	3500K	6¾	16,000	3200	2720	82
			13659-8	\$ ● (242)	PL-T 42W/841/4P/HTA ALTO	CFTR42W/GX24q/841	12	4100K	6¾	16,000	3200	2720	82
57	PL-T	GX24q-5	14631-6	\$	PL-T 57W/830/4P/A	CFTR57W/GX24q/830	10	3000K	7¾	16,000	4300	3741	82
			14632-4	\$	PL-T 57W/835/4P/A	CFTR57W/GX24q/835	10	3500K	7¾	16,000	4300	3741	82
			14633-2	\$	PL-T 57W/841/4P/A	CFTR57W/GX24q/841	10	4100K	7¾	16,000	4300	3741	82

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 69

PHILIPS PL-T


Warranty Period: 18 months*

PHILIPS PL-T

ENERGY ADVANTAGE

Warranty Period: 24 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.



COMPACT FLUORESCENT LAMPS

PL-L Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Generic Designation	Pkg. Qty.	Desc.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Approx. Initial Lumens (231)	Design Lumens (208)	CRI
25	PL-L	2G11	20913-0	\$	PL-L 40W/830/XEW/4P/IS 25W	FT40W/2G11/RS/830	25	3000K	22½	24,000	2600	2470	82
			20914-8	\$	PL-L 40W/835/XEW/4P/IS 25W	FT40W/2G11/RS/835	25	3500K	22½	24,000	2600	2470	82
			15698-3	\$ †	PL-L 40W/835/XEW/4P/IS 25W	FT40W/2G11/RS/835	10	3500K	22½	24,000	2600	2470	82
			20915-5	\$	PL-L 40W/841/XEW/4P/IS 25W	FT40W/2G11/RS/841	25	4100K	22½	24,000	2600	2470	82

PL-L (LONG) FLUORESCENT LAMPS—ENERGY ADVANTAGE

PL-L (LONG) FLUORESCENT LAMPS

18	PL-L	2G11	34500-9	\$	PL-L 18W/830/4P	FT18W/2G11/830	25	3000K	8⅞	15,000	1250	1125	82
			35932-3	\$	PL-L 18W/835/4P	FT18W/2G11/835	25	3500K	8⅞	15,000	1250	1125	82
			34501-7	\$	PL-L 18W/841/4P	FT18W/2G11/841	25	4100K	8⅞	15,000	1250	1125	82
24	PL-L	2G11	34505-8	\$	PL-L 24W/830/4P	FT24W/2G11/830	25	3000K	12⅞	15,000	1800	1620	82
			35933-1	\$	PL-L 24W/835/4P	FT24W/2G11/835	25	3500K	12⅞	15,000	1800	1620	82
			34508-2	\$	PL-L 24W/841/4P	FT24W/2G11/841	25	4100K	12⅞	15,000	1800	1620	82
36	PL-L	2G11	34511-6	\$	PL-L 36W/830/4P	FT36W/2G11/830	25	3000K	16⅞	15,000	2900	2610	82
			34942-3	\$	PL-L 36W/835/4P	FT36W/2G11/835	25	3500K	16⅞	15,000	2900	2610	82
			34513-2	\$	PL-L 36W/841/4P	FT36W/2G11/841	25	4100K	16⅞	15,000	2900	2610	82
40	PL-L	2G11	30042-6	\$	PL-L 40W/830/4P/RS/IS	FT40W/2G11/RS/830	25	3000K	22½	20,000	3300	2970	82
			30043-4	\$	PL-L 40W/835/4P/RS/IS	FT40W/2G11/RS/835	25	3500K	22½	20,000	3300	2970	82
			30044-2	\$	PL-L 40W/841/4P/RS/IS	FT40W/2G11/RS/841	25	4100K	22½	20,000	3300	2970	82
50	PL-L	2G11	34747-6	\$	PL-L 50W/830/4P/RS	FT50W/2G11/RS/830	25	3000K	22½	20,000	4300	3870	82
			34753-4	\$	PL-L 50W/835/4P/RS	FT50W/2G11/RS/835	25	3500K	22½	20,000	4300	3870	82
			34770-8	\$	PL-L 50W/841/4P/RS	FT50W/2G11/RS/841	25	4100K	22½	20,000	4300	3870	82
55	PL-L	2G11	13844-6	\$	PL-L 55W/950/4P/RS	FT55W/2G11/RS/950	25	5000K	21⅞	20,000	3650	3358	91
80	PL-L	2G11	38698-7	\$	PL-L 80W/835/4P	FT80W/2G11/835	25	3500K	22½	20,000	6000	5400	82
			38699-5	\$	PL-L 80W/841/4P	FT80W/2G11/841	25	4100K	22½	20,000	6000	5400	82

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 69

PHILIPS PL-L STANDARD

Warranty Period: 24 months*

PHILIPS PL-L

ENERGY ADVANTAGE

Warranty Period: 30 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.

PL-L
2G11PL-L
2G11 Base

COMPACT FLUORESCENT LAMPS

PL-H, PL-Q Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Generic Designation	Pkg. Qty.	Desc.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Approx. Initial Lumens (231)	Design Lumens (208)	CRI
PL-H (HIGH) FLUORESCENT LAMPS													
60	PL-H	2G8-I	I3368-6	\$●X	PL-H 60W/830/4P/ALTO	To be phased out Q3 2010	10	3000K	7 ¹¹ / ₄	20,000	4000	3440	82
85	PL-H	2G8-I	I3370-2	\$●X	PL-H 85W/830/4P/ALTO	To be phased out Q3 2010	10	3000K	8 ²⁵ / ₃₂	20,000	6000	5160	82
			I3371-0	\$●XX	PL-H 85W/841/4P/ALTO	To be phased out Q4 2011	10	4100K	8 ²⁵ / ₃₂	20,000	6000	5160	82
120	PL-H	2G8-I	I3372-8	\$●X	PL-H 120W/830/4P/ALTO	To be phased out Q3 2010	10	3000K	11 ¹³ / ₁₆	20,000	9000	7740	82
			I3373-6	\$●XX	PL-H 120W/841/4P/ALTO	To be phased out Q4 2011	10	4100K	11 ¹³ / ₁₆	20,000	9000	7740	82

PL-Q SQUARE SHAPE FLUORESCENT LAMPS—4 PIN

38	PL-Q		I5941-8		PL-Q 38W/827/4P	CFS38W/GRI0q/827	10	2700K	8 ¹ / ₂	10,000	2850	2395	82
----	------	--	---------	--	-----------------	------------------	----	-------	-------------------------------	--------	------	------	----

For the most current product information, go to the e-catalog on www.philips.com
Compact fluorescent symbols and footnotes located on page 69

PHILIPS PL-H

Warranty Period: 24 months*

PHILIPS PL-Q

Warranty Period: 12 months*

* Certain limitations and conditions apply.
See Philips for further warranty details.



PL-H
2G8-I Base

COMPACT FLUORESCENT LAMPS

Consumer Lamps

Watts	Bulb	Base	Product Number	Symbols, Footnotes	Ordering Code	Generic Designation	Pkg. Qty.	Desc.	MOL (In.)	Rated Avg. Life (Hrs.) (230)	Approx. Initial Lumens (231)	Design Lumens (208)	CRI
5	PL-S	G23	23021-9	●	PL-S 5W/827/2P/ALTO		6	2700K	4 $\frac{3}{32}$	10,000	250	215	80
7	PL-S	G23	23022-7	●	PL-S 7W/827/2P/ALTO		6	2700K	5 $\frac{1}{32}$	10,000	400	340	80
9	PL-S	G23	23032-6	●	PL-S 9W/827/2P/ALTO		6	2700K	6 $\frac{3}{32}$	10,000	600	510	80
13	PL-S	GX23	23010-2	●	PL-S 13W/827/2P/ALTO		6	2700K	7 $\frac{1}{64}$	10,000	800	675	80
			23012-8	●	PL-S 13W/841/2P/ALTO		6	4100K	7 $\frac{1}{64}$	10,000	800	675	80
	PL-C	GX23-2	23039-1		PL-C 13W/827/2P USA		6	2700K	4 $\frac{3}{8}$	10,000	860	730	80
			23040-9		PL-C 13W/841/2P USA		6	4100K	4 $\frac{3}{8}$	10,000	860	730	80
		G24q-1	23035-9		PL-C 13W/827/4P		6	2700K	5 $\frac{3}{16}$	10,000	780	665	80
			23036-7		PL-C 13W/841/4P		6	4100K	5 $\frac{3}{16}$	10,000	780	665	80
18	PL-C	G24q-2	23041-7		PL-C 18W/827/4P		6	2700K	6	10,000	1150	990	80
	PL-T	GX24q-2	40981-3	●	PL-T 18W/827/4P/ALTO		6	2700K	4 $\frac{3}{8}$	12,000	1200	1020	80
26	PL-C	G24q-3	23042-5		PL-C 26W/827/4P		6	2700K	6 $\frac{3}{16}$	10,000	1710	1470	80
			23044-1		PL-C 26W/835/4P		6	3500K	6 $\frac{3}{16}$	10,000	1710	1470	80
	PL-T	GX24q-3	23045-8	●	PL-T 26W/827/4P/ALTO		6	2700K	5	12,000	1800	1530	80


For the most current product information, go to the e-catalog on www.philips.com
 Compact fluorescent symbols and footnotes located on page 69




COMPACT FLUORESCENT LAMPS

PL Base Types and Bulb Shapes

PL Base Types (Not Actual Sizes)

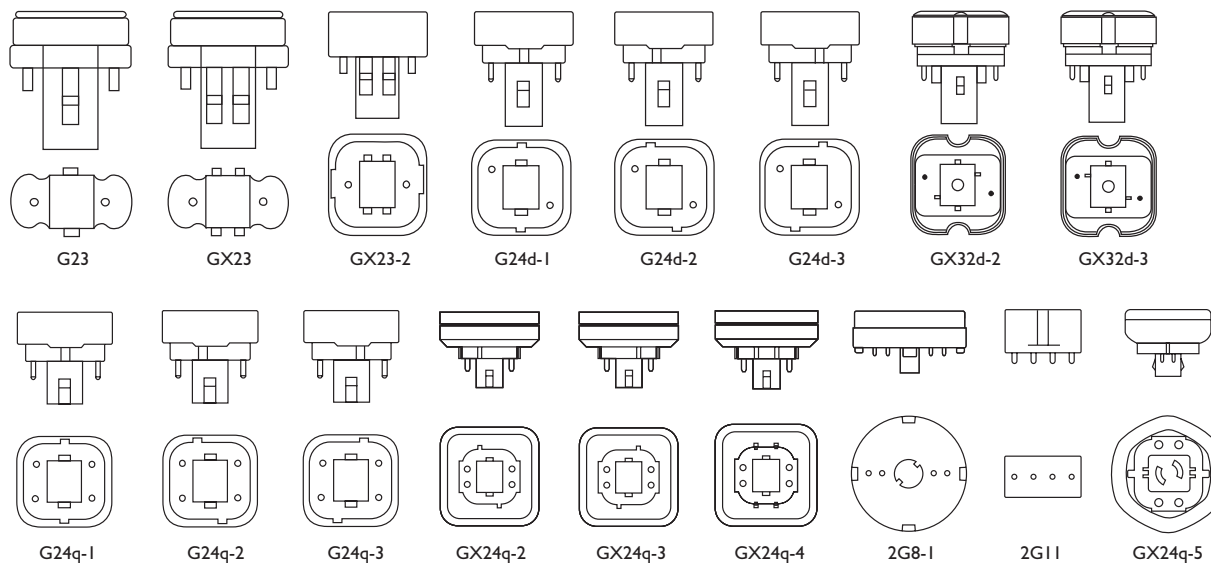

PL Bulb Shapes (Not Actual Sizes)

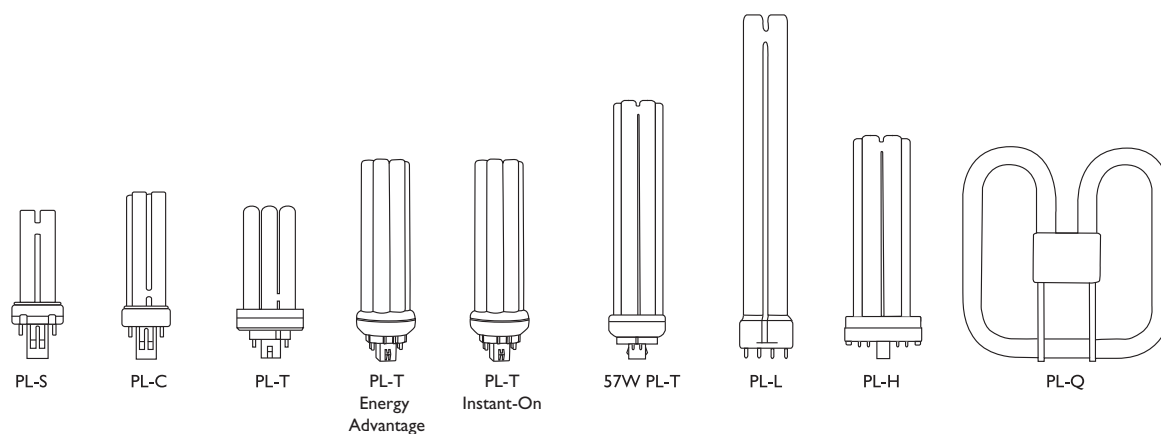

COMPACT FLUORESCENT LAMPS

For the most current product information, go to the e-catalog on www.philips.com

□ Exclusive to Philips Lighting Company

\$ Energy Saving Product

● This lamp is better for the environment because of its reduced mercury content. All Philips ALTO lamps give you end-of-life options, which can simplify and reduce your lamp disposal costs, depending on your state and local regulations

■ ENERGY STAR Bulb: As an ENERGY STAR Partner, Philips has determined that this product meets the ENERGY STAR guidelines for energy efficiency

✕ Orders will be shipped until inventory is depleted; no longer manufactured

✕✕ Lamps will be phased out by end of 2011

© This Bulb Meets US Federal Minimum Efficiency Standard

† New since last printing

◇ Designed for instant start operation

T– ENERGY STAR testing in progress

§ "Made-To-Order". Product is not kept in inventory. Minimum quantities will apply

+ Product will not be released until Spring 2011

(208) Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions.

(222) Low temperature starting down to -20°F at nominal line voltage.

(230) Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours.

(231) Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life under standard laboratory conditions.

(242) HTA (High Temperature Application) HTA lamps are designed to achieve optimum light output in higher temperature applications (approx. 140–150°F). HTA lamps are not recommended for dimming.