



PK6V1F1

RECHARGEABLE SEALED LEAD ACID (VRLA) BATTERY

Nominal Voltage 6 Volt

20 Hour Rate Capacity 1 Ah



Dimensions	Inches	mm
Length	2.01	51
Width	1.65	42
Case Height	2.01	51
Terminal Height	2.20	56
[See Drawing for Tolerances]		
Weight (Approx.)	Lbs.	Kg
	0.66	0.30

Constant Current Discharge Characteristics at 73.4°F (23°C)

Case Material	A.B.S. (UL94-HB)
Terminal	Faston Type 187 (F1)
Maximum Short Duration Discharge Current	
(5 Seconds or Less)	15 Amperes
(10 Seconds or Less)	10 Amperes
(60 Seconds or Less)	6 Amperes

Discharge Time	Discharge Amperes	Capacity in Ah's	Final Voltage	Discharge C-Rate
20.0 Hrs	0.05	1.000	5.25	0.05
9.2 Hrs	0.10	0.925	5.25	0.10
5.0 Hrs	0.17	0.847	5.15	0.17
4.1 Hrs	0.20	0.814	5.10	0.20
2.1 Hrs	0.35	0.745	4.97	0.35
64.0 Mins	0.60	0.64	4.77	0.6
32.5 Mins	1.00	0.54	4.50	1.0
7.2 Mins	3.00	0.36	3.00	3.0


Internal Resistance (Fully Charged Battery)	(Approximately) 33 mOhm
--	-------------------------

Energy Density (@ 20 Hour Rate)	0.9 Watt-Hours/Cubic Inch (54.92 Watt-Hours/Litre)
--	--

Specific Energy (@ 20 Hour Rate)	9.11 Watt-Hours / Pound (20.08 Watt-Hours / Kg)
---	---

Operating Temperature Range	
Discharge	-4°F (-20°C) ~ 122°F (50°C)
Recharge	32°F (0°C) ~ 104°F (40°C)
Storage	-4°F (-20°C) ~ 104°F (40°C)

Self Discharge Rate	About 3% / Month @ 68~77°F (20~25°C)
----------------------------	--------------------------------------

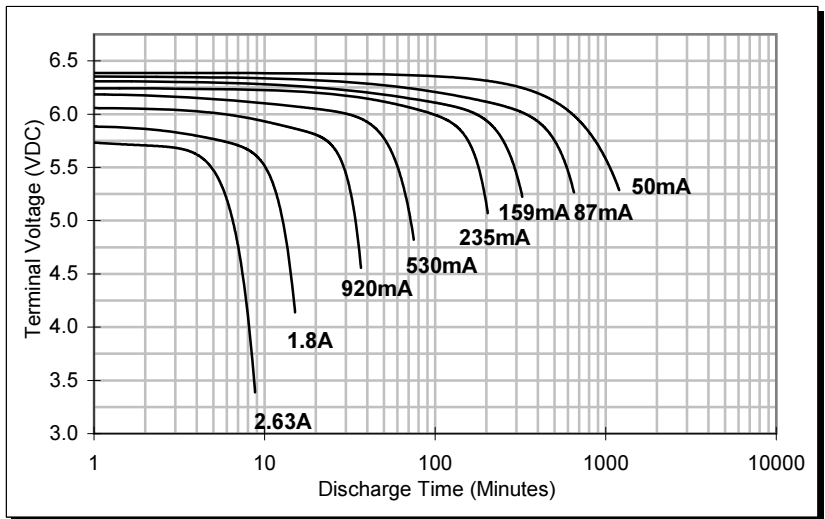

Recharge Method : Connect battery to a Current Limited, Constant Voltage Source.


- Limit the initial recharge current to 250 mA or less.
- To promote satisfactory performance in Cyclic applications, a minimum recharge current of 100 mA is recommended.
- Employ Charge Voltage Temperature Compensation when battery temperature is less than 50°F (10°C) or greater than 86°F (30°C). Use the **Recommended** voltage and normalize to 77°F (25°C).
- The use of compensation through the whole temperature range is not generally necessary, but doing so may optimize service life.
- If the **Recommended** recharge voltage is used, no Temperature Compensation is required within the range of 50~86°F (10~30°C).


Cyclic Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
7.20	7.28	7.35	Volts D.C.
2.40	2.425	2.45	Per Cell
Temperature Coefficient: -2.8mV/°F/Cell (-5mV/°C/Cell)			

Standby Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
6.75	6.83	6.90	Volts D.C.
2.25	2.275	2.30	Per Cell
Temperature Coefficient: -1.7mV/°F/Cell (-3mV/°C/Cell)			

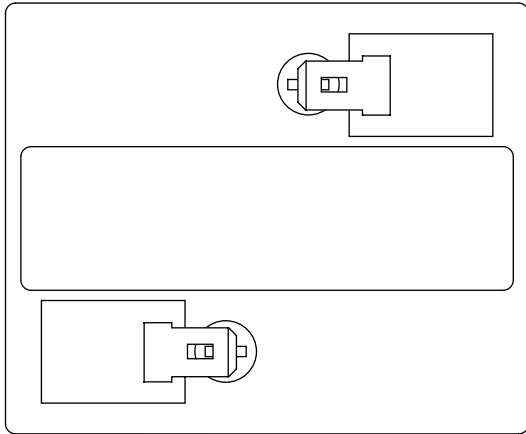

Peak Energy Products PK Series Rechargeable Sealed Lead-Acid (VRLA) Battery			
Model:	PK6V1		
Voltage:	6	Capacity:	1 Ah (20 Hr)
Terminal:	Faston Type 187 (F1)		
Dimensions:	mm (Inch)		
Drawing:	PK6V1T-0201CE		
Date:	2002.01.07		
© Peak Energy Products			
DO NOT SCALE DRAWING			

