



PK6V8.5F4

RECHARGEABLE SEALED LEAD ACID (VRLA) BATTERY

Nominal Voltage 6 Volt

20 Hour Rate Capacity 8.5 Ah



Dimensions	Inches	mm
Length	3.86	98
Width	2.20	56
Case Height	4.65	118
Terminal Height	4.65	118
[See Drawing for Tolerances]		
Weight (Approx.)	Lbs.	Kg
	3.72	1.69

Constant Current Discharge Characteristics at 73.4°F (23°C)

Case Material A.B.S. (UL94-HB)

Terminal Faston Type 187 (F1) [Position: F4]

Maximum Short Duration Discharge Current

(5 Seconds or Less)	127.5 Amperes
(10 Seconds or Less)	85 Amperes
(60 Seconds or Less)	48 Amperes

Internal Resistance (Fully Charged Battery)
(Approximately) 10 mOhm

Energy Density (@ 20 Hour Rate)
1.29 Watt-Hours/Cubic Inch (78.75 Watt-Hours/Litre)


Specific Energy (@ 20 Hour Rate)
13.72 Watt-Hours / Pound (30.26 Watt-Hours / Kg)

Operating Temperature Range

Discharge	-4°F (-20°C) ~ 122°F (50°C)
Recharge	32°F (0°C) ~ 104°F (40°C)
Storage	-4°F (-20°C) ~ 104°F (40°C)

Self Discharge Rate
About 3% / Month @ 68~77°F (20~25°C)

Discharge Time	Discharge Amperes	Capacity in Ah's	Final Voltage	Discharge C-Rate
20.0 Hrs	0.43	8.50	5.25	0.05
9.2 Hrs	0.85	7.86	5.25	0.10
5.0 Hrs	1.45	7.20	5.15	0.17
4.1 Hrs	1.70	6.92	5.10	0.20
2.1 Hrs	2.98	6.33	4.97	0.35
64.0 Mins	5.10	5.44	4.77	0.6
32.5 Mins	8.50	4.60	4.50	1.0
7.2 Mins	25.5	3.05	3.00	3.0

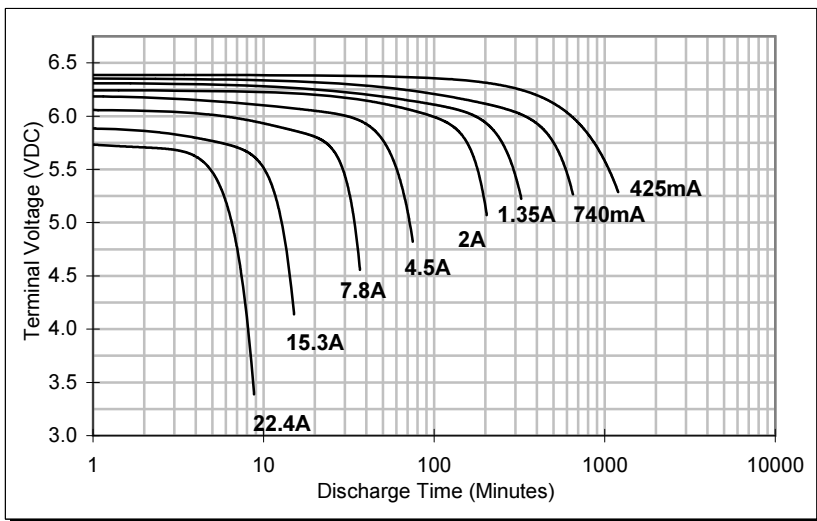

Recharge Method : Connect battery to a Current Limited, Constant Voltage Source.


- Limit the initial recharge current to 2.125 Amperes or less.
- To promote satisfactory performance in Cyclic applications, a minimum recharge current of 850 mA is recommended.
- Employ Charge Voltage Temperature Compensation when battery temperature is less than 50°F (10°C) or greater than 86°F (30°C). Use the **Recommended** voltage and normalize to 77°F (25°C).
- The use of compensation through the whole temperature range is not generally necessary, but doing so may optimize service life.
- If the **Recommended** recharge voltage is used, no Temperature Compensation is required within the range of 50~86°F (10~30°C).

Cyclic Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
7.20	7.28	7.35	Volts D.C.
2.40	2.425	2.45	Per Cell
Temperature Coefficient: -2.8mV/°F/Cell (-5mV/°C/Cell)			

Standby Application Recharge Voltage (77°F / 25°C)

Minimum	Recommended	Maximum	
6.75	6.83	6.90	Volts D.C.
2.25	2.275	2.30	Per Cell
Temperature Coefficient: -1.7mV/°F/Cell (-3mV/°C/Cell)			

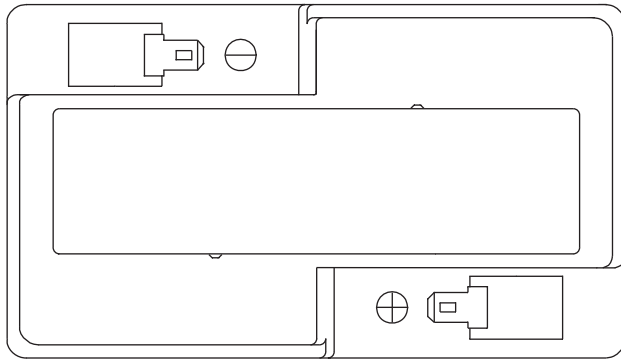

Peak Energy Products PK Series		
Rechargeable Sealed Lead-Acid (VRLA) Battery		
Model:	PK6V8.5	
Voltage:	6	Capacity: 8.5 Ah (20 Hr)
Terminal:	Faston Type 187 (F1)	
Dimensions:	mm (Inch)	
Drawing:	PK6V8.5F4T-0405CE	
Date:	2004.05.28	
© Peak Energy Products		
DO NOT SCALE DRAWING		

